





1. Lock & Stop can be installed in a floor sink or a floor drain. Remove any drain strainers, covers, or grates.

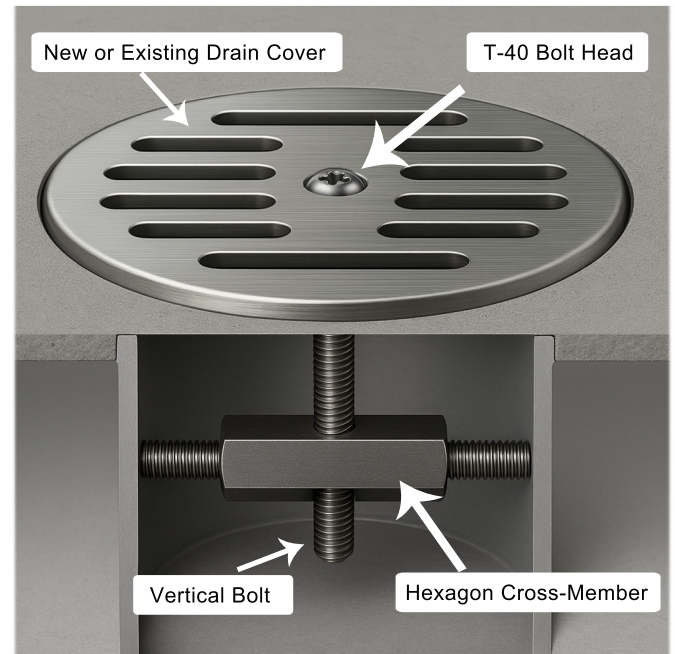


2. Size the crossmember

Rotate the bolts out of the hexagon so they are approximately equal in length and can easily fit into the drain. Please note the bolts have opposite threads.

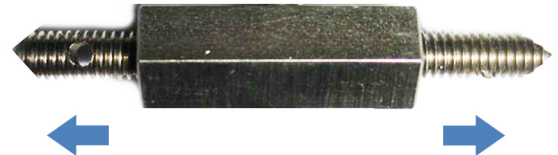

3. Insert

Place the Lock & Stop in the drain using the provided installation tool. Ideally the cross member will sit about 1" deep into the drain pipe. But it can go deeper if needed. Be sure not to drop any parts into the drain.

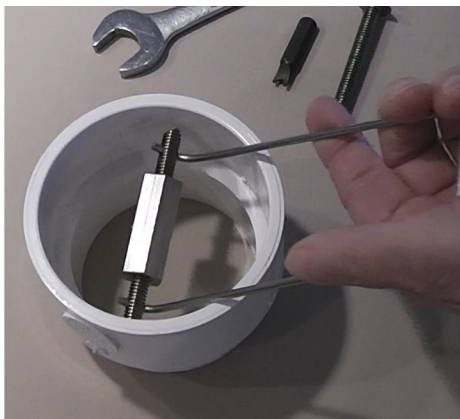

4. Hand-Tighten

Rotate the hexagon to extend the screws until they are pressed firmly against the inner wall of the pipe.

5. Tighten with wrench


Tighten the hexagon with a wrench. Ensure the hole is centered and vertical. Do not over-tighten, especially with PVC pipes. Remove the installation tool when hexagon cross-piece is secure.




6. Drill hole (if needed)

If the drain cover does not have a hole in the center, you will have to drill the hole. If the drain cover is in a location where pedestrians may walk on it, you must countersink the hole so that no part of the bolt protrudes in a manner that could create a tripping hazard. The standard bolt size is 5/16". The drain and hardware must remain flush with the walking surface.


***We recommend ordering a new drain cover with a pre-drilled hole from Drain-Net Technologies.

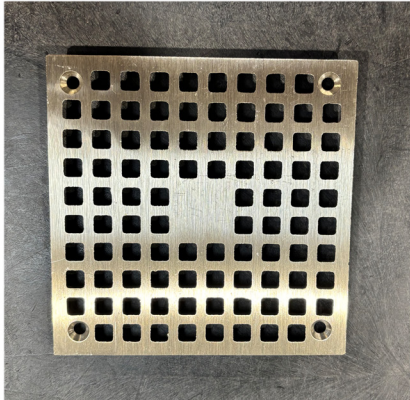

Remove drain cover

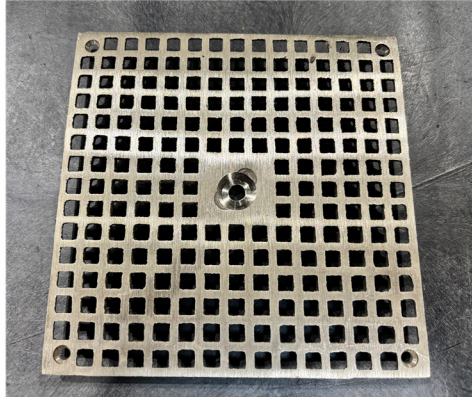

Safely drill a countersink
hole

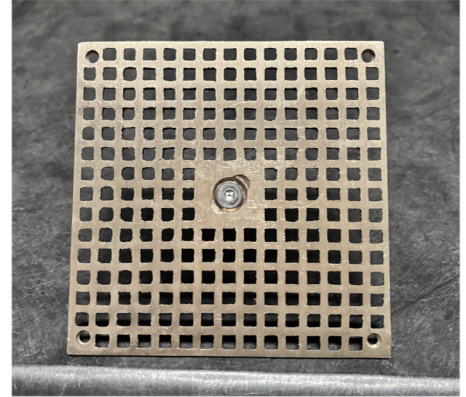

Ensure bolt is flush with
drain cover

7. Bolt down drain cover

Place the drain cover back over the drain and insert the vertical bolt through the center drain hole and into the hole in the cross member (hex bolt). The vertical bolt secures your drain to the crossmember.



view from side

8. Lock with T40 Tamper-proof bit.

Tighten the Lock & Stop vertical bolt using a T40 security bit (Sold Separate). Be sure to keep the tamper-proof bit in a secure place.



Torx T40 Bolt Head



T40 bit socket
Sold Separate

Drain-Net Technologies – Lock & Stop Product Warranty & Safety Notice

Limited Warranty

The Lock & Stop product is warranted against defects in material and workmanship for a period of one (1) year from the original date of purchase. Warranty is limited to repair or replacement of the defective product only.

Important Safety Notice

When installing the Lock & Stop into existing drain covers, please ensure that the hole is sufficient and that no part of the bolt or fastener protrudes in a manner that could create a **tripping hazard**. The standard bolt size is 5/16". Installers may use different style bolts, but under no circumstances should hardware extend above the walking surface of the drain cover.

Failure to follow these installation instructions may result in accidents, injuries, or voiding of this warranty.

Exclusions & Limitation of Liability

This warranty does not cover damage caused by misuse, improper installation, abuse, or modification. Drain-Net Technologies shall not be responsible for any incidental or consequential damages resulting from installation or use of the Lock & Stop product.